

The CurbCushion was designed for ease of use and flexibility when fitting it to your particular curb, and only takes minutes to get set up. It's easy to tell which side is the top, the CurbCushion logos should always face up. For a smooth ride every time, just follow these steps.

**1)** On your curb, lay the wood support bars in the pit of your curb to ensure a proper fit. Adjust their position for the best fill and support.

**2)** Using the provided screws, attach the rubber pad to the supports. Make sure to use the screw holes that best align with the center of the supports.


Note that the two four foot sections are always in the middle and the two foot sections are placed on the ends.

**The DuallyGuard Kit Includes:**

- 3 - 48" X 20" X 3/8" Molded Rubber Cushions
- 2 - 48" X 3.5" X 1.5" Wood support section
- 2 - 24" X 3.5" X 1.5" Wood support sections
- 18 - Phillips head screws

**You will need:**

- One standard Phillips head screwdriver
- OR -
- One cordless drill with a Phillips driver bit.

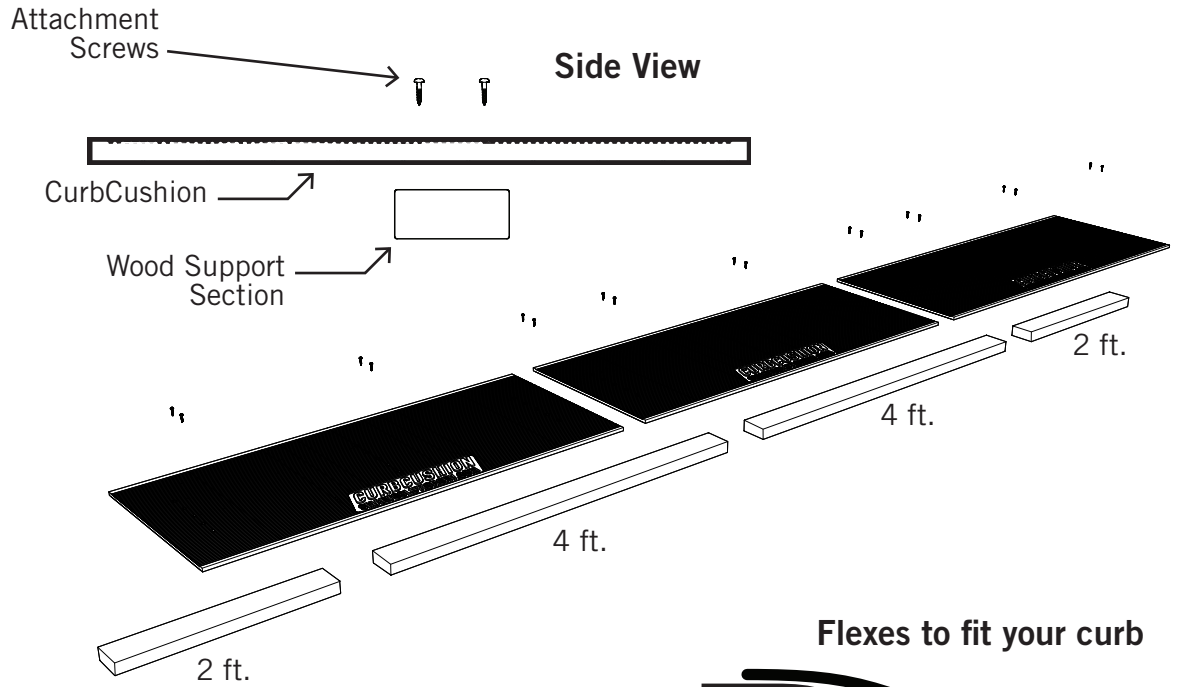

**Flexes to fit your curb**



**Top View**

